TRAMO-ETV AB , SE-241 92 ESLÖV Tel. 0413-54 12 10 Fax. 0413-54 11 95

Documentation Power supply

Single-phase AC/DC power supply
24 VDC

Art.no: **52 481 24**

Type:

LOTKU-20

Non stabilized, smoothed AC/DC power supply for 24VDC

Primary voltage: ±15-230-400 VAC

Frequency: 50-60 Hz

Secondary voltage: No load 27 VDC

80% load 24 VDC

Secondary current: 20 A

Ripple level: <7% (3,3VPP)

ta: 40°C (maximum ambient temperature)

Losses: Po 23 W , Pl 85 W

Used components are UL-approved

Standards: EN 61558-2-6, EN 50081-2, EN 50082-2

Connecting diagram

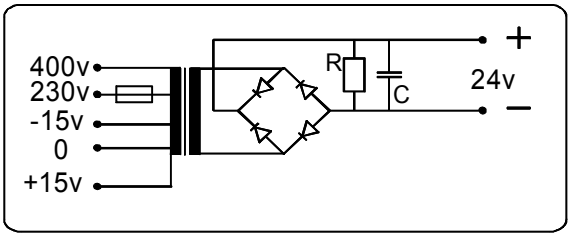

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

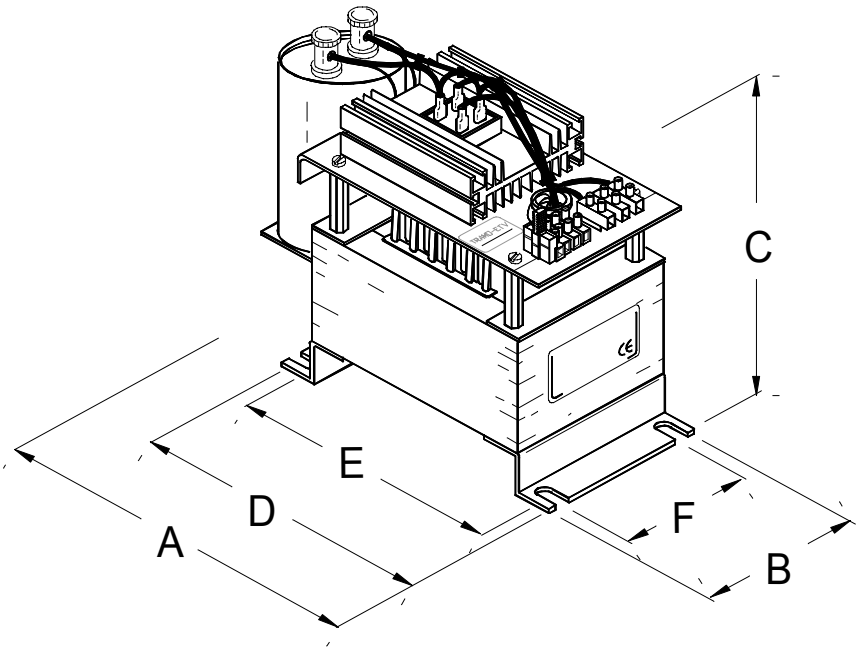

A: 250 mm
B: 125 mm
C: 225 mm
D: 190 mm
E: 175 mm
F: 100 mm

Weight: 11,8 kg

CE