

Documentation Power supply

Single-phase AC/DC power supply  
12 VDC

Art.no: **1275-07331**

Type:  
**LOT-3012**

Non-stabilized, unsmoothed AC/DC power supply for 12VDC

Primary voltage: 0-220-230 VAC

Frequency: 50-60 Hz

Secondary voltage: 80% load 12 VDC

Secondary current: 30 A


ta: 40°C (maximum ambient temperature)

Losses: Po 15 W , PI 78 W

Used components are UL-approved

Standards: EN 61558-2-6, EN 50081-2, EN 50082-2

Connecting diagram

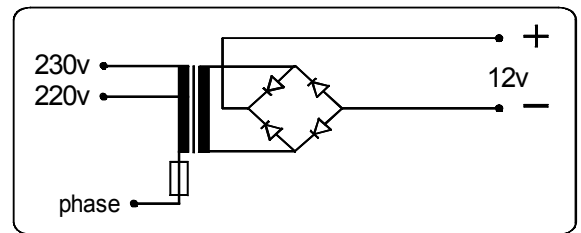

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

