

## Documentation Power supply

### Single-phase AC/DC power supply 24 VDC

Art.no: **1200-3736**

Non-stabilized, unsmoothed AC/DC power supply for 24VDC

Primary voltage: 0-220-230 VAC

Frequency: 50-60 Hz

Secondary voltage: No load <27 VDC  
80% load 24 VDC

Secondary current: 2,4 A

ta: 40°C (maximum ambient temperature)

Losses: Po 3,4 W , PI 13,3 W


Used components are UL-approved

**Standards: EN 61558-2-6, EN 50081-2, EN 50082-2**

Type:

**LOT-2,4**

Connecting diagram

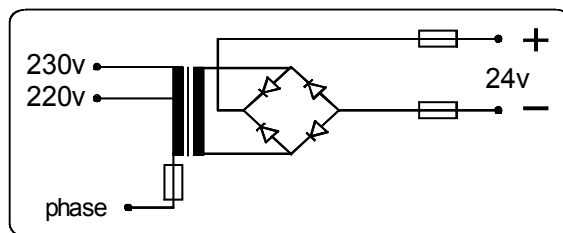

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

A: 70 mm  
B: 80 mm  
C: 120 mm  
E: 56 mm  
F: 54 mm

Weight: 1,5 kg