

## Documentation Power supply

### Single-phase AC/DC power supply 12 VDC

Art.no: **1200-2598**

Non stabilized, smoothed AC/DC power supply for 12 VDC

Primary voltage: 0-220-230-240 VAC

Frequency: 50-60 Hz

Secondary voltage: No load 14,3 VDC  
80% load 12 VDC

Secondary current: 5 A

Ripple level: 8% (1,9VPP)

ta: 40°C (maximum ambient temperature)

Losses: Po 7,5 W , PI 21 W

Used components are UL-approved


**Standards: EN 61558-2-6, EN 50081-2, EN 50082-2**

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

Type:

**LOTK-512**

Connecting diagram

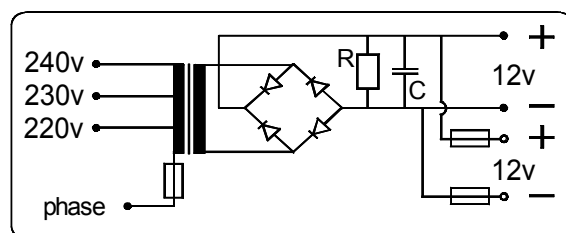

A: 157 mm  
B: 80 mm  
C: 130 mm  
D: 123 mm  
E: 113 mm  
F: 63 mm

Weight: 2,5 kg

