

Documentation Power supply

Single-phase AC/DC power supply 12 VDC

Art.no: **1200-2600**

Non stabilized, smoothed AC/DC power supply for 12 VDC

Primary voltage: 0-220-230-240 VAC

Frequency: 50-60 Hz

Secondary voltage: No load 14,2 VDC
80% load 12 VDC

Secondary current: 20 A

Ripple level: 7,5% (1,8VPP)

ta: 40°C (maximum ambient temperature)

Losses: Po 14 W , PI 76 W

Used components are UL-approved


Standards: EN 61558-2-6, EN 50081-2, EN 50082-2

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

Type:

LOTK-2012

Connecting diagram

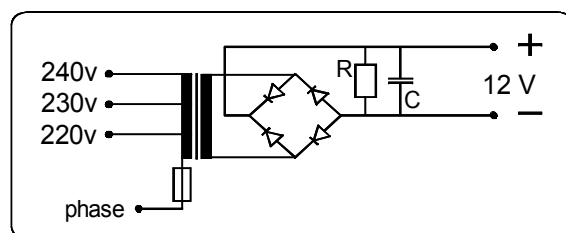

A: 250 mm
B: 125 mm
C: 210 mm
D: 190 mm
E: 175 mm
F: 100 mm

Weight: 9,1 kg

