

Documentation Power supply

Single-phase AC/DC power supply 48 VDC

Art.no: **1275-02933**

Non stabilized, smoothed AC/DC power supply for 48VDC

Primary voltage: 0-220-230-240 VAC

Frequency: 50-60 Hz

Secondary voltage: No load 52,5 VDC
80% load 48 VDC

Secondary current: 7,5 A

Ripple level: <5% (4,8VPP)

ta: 40°C (maximum ambient temperature)

Losses: Po 20 W , PI 48 W

Used components are UL-approved


Standards: EN 61558-2-6, EN 50081-2, EN 50082-2

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

Type:

LOTK-7,5A48V

Connecting diagram

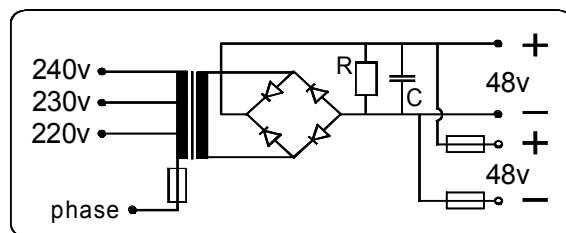

- A: 235 mm
- B: 125 mm
- C: 185 mm
- D: 190 mm
- E: 175 mm
- F: 100 mm

Weight: 9,1 kg

