

Documentation Power supply

Single-phase AC/DC power supply 48 VDC

Art.no: **1275-03297**

Non stabilized, smoothed AC/DC power supply for 48VDC

Primary voltage: 0-220-230-240 VAC

Frequency: 50-60 Hz

Secondary voltage: No load 52,5 VDC
80% load 48 VDC

Secondary current: 20 A

Ripple level: <9% (8,6VPP)

ta: 40°C (maximum ambient temperature)

Losses: Po 39 W , PI 92 W


Used components are UL-approved

Standards: EN 61558-2-6, EN 50081-2, EN 50082-2

Type:

LOTK-20A48V

Connecting diagram

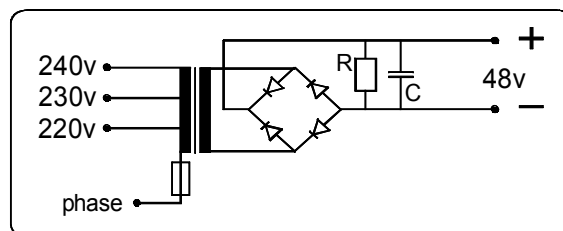

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

