

# Documentation Power supply

## Three-phase AC/DC power supply 24 VDC

Art.no: **1275-2712**

Non stabilized, unsmoothed AC/DC power supply for 24VDC

Primary voltage: 3x380-400 VAC

Frequency: 50-60 Hz

Secondary voltage: No load 27 VDC  
80% load 24 VDC

Secondary current: 5 A

Ripple level: 8,5% (4VPP)

ta: 40°C (maximum ambient temperature)


Losses: Po 6,5 W , PI 18 W

Used components are UL-approved

**Standards: EN 61558-2-6, EN 50081-2, EN 50082-2**

Type:  
**TLOT-5**

Connecting diagram

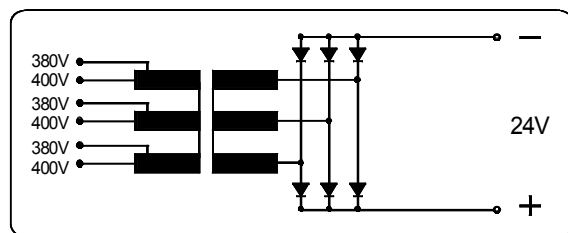

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

