

Documentation Power supply

**Three-phase AC/DC power supply  
24 VDC**

Art.no: **1275-2726**

Non stabilized, unsmoothed AC/DC power supply for 24VDC

Primary voltage: 3x380-400 VAC

Frequency: 50-60 Hz

Secondary voltage: No load 26 VDC  
80% load 24 VDC

Secondary current: 50 A

Ripple level: <8,5% (4VPP)

ta: 40°C (maximum ambient temperature)


Losses: Po 29 W , PI 122 W

Used components are UL-approved

**Standards: EN 61558-2-6, EN 50081-2, EN 50082-2**

Type:  
**TLOT-50**

Connecting diagram

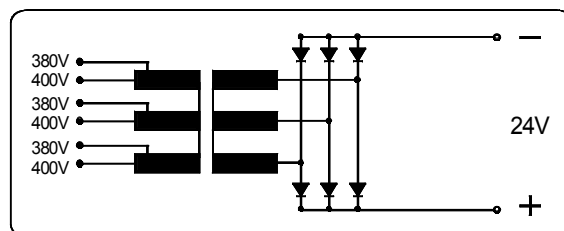

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

A: 245 mm  
B: 240 mm  
C: 275 mm  
D: 232 mm  
E: 160 mm  
F: 200 mm

Weight: 22 kg